


Universal Ventilation Material.



- **Won't absorb moisture, which can freeze and block all ventilation**
- **Easy one person installation**
- **40 year limited warranty**
- **ASTM E 84 tested/rated**

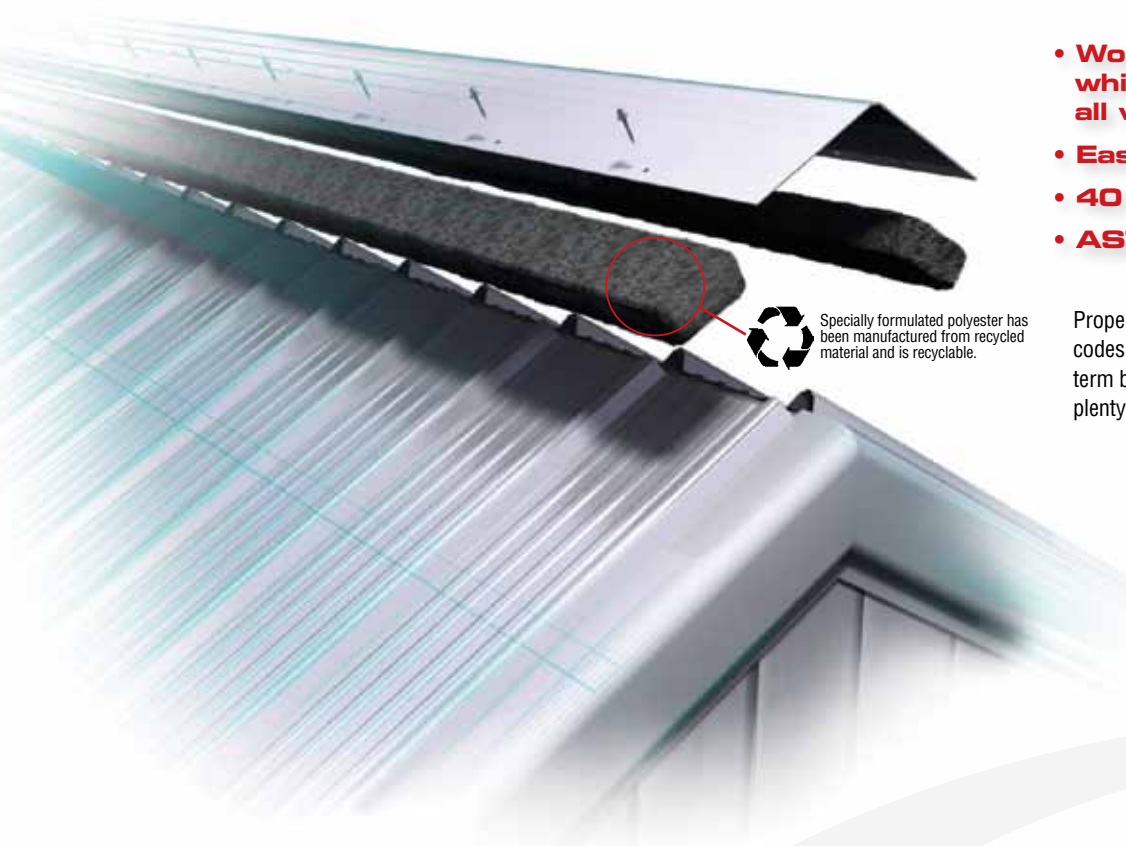

Specially formulated polyester has been manufactured from recycled material and is recyclable.

Proper ventilation is important to meet building codes, to reduce utility costs, and reduce long-term building damage. Flex-O-Vent provides plenty of cooling air flow.

EXTREMELY DURABLE POLYESTER

FLAME-RESISTANT/CLOG-RESISTANT/TEAR-RESISTANT

ECONOMICAL/LONG LASTING




FLEX-O-VENT

One element of the Marco WEATHER-TITE™ SYSTEM

Flex-O-Vent

Flexibility, versatility, durability.
Universal Ventilation Material

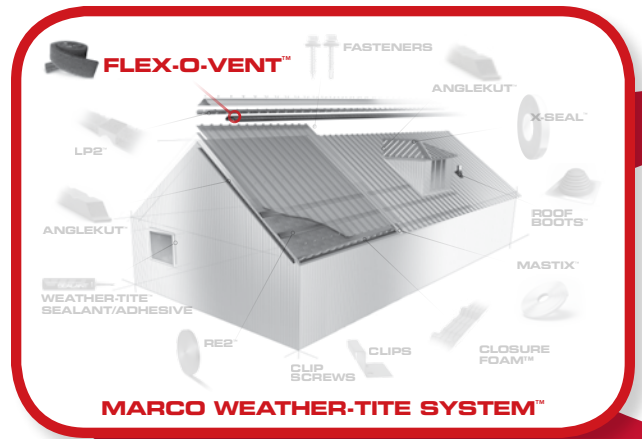

Easy Installation



Flexible Design



Universal Fit

Specifications

| | |
|-----------------------------|---|
| Net Free Area | 19 square inches per Linear Foot-ridge |
| 1-1/2" x 3" x 10' | Rib heights 1 1/4" and lower |
| Air Permeability | 760 Cubic Feet per minute |
| Cold Cracking | -55°C (-130°F) |
| Snow Infiltration | 0 |
| Tear Strength | 3.5 ppi |
| Tensile Strength | 16 psi – Elongation 175% |
| Compressive Strength | 1.8 psi @ 75% |
| Abrasion | No Damage |
| 100 mpg Wind-driven Rain .. | No Leakage Non-Profile Sensitive |

Flex-O-Vent represents yet another Marco Industries technological development in bringing you innovative, higher quality, and more economical products for the building industry.

To order: 1.800.800.8590 | MarcoIndustries.com | info@MarcoIndustries.com



MPC0311

Marco Industries Corporate: 9410 E. 54th Street | Tulsa, OK 74145 | 1.800.800.8590
Marco Industries Canada: 1632 Broder Street | Regina, Sask S4N 7K1 | 1.866.244.7573