





ŀ	DESCRIPTION:	Advanced Ozone Resistance tested to	EPDM 70 hour @ 500 pphm	70 hour @ 500 pphm	ASTM Standard	s:		Materials:
	Pipe Flashing Master Flash® Standard Retrofit #1 Pipe Range: 1/2" to 4"(12 to 100mm) • Base: 8-3/16" (205mm)	High Temperature Resistance Intermittent Continuous	+135°C (+275°F) +100°C (+212°F)	+260°C (+500°F) +225°C (+437°F)				
L		Low Temperature Resistance tested to	– 55°C (-67°F)	- 74°C (-101°F)				DRAWING NUMBER:
	Confidentally Agreement	Compression Set Maximum	25%	50%		NAME:	DATE:	
Γ	THIS DRAWING CONTAINS INFORMATION THAT IS PROPERTY OF MARCO INDUSTRIES	BOX QUANITY:			DRAWN BY:			MARCO PART #MFRF101
	THIS DRAWING MAY NEITHER BE USED, COPIED, REPRODUCED OR DISTRIBUTED TO				CHECKED BY:			WANCO FANT #WIFNFTUT
L	THIRD PARTIES WITHOUT WRITTEN CONSENT.				APPROVED BY:			



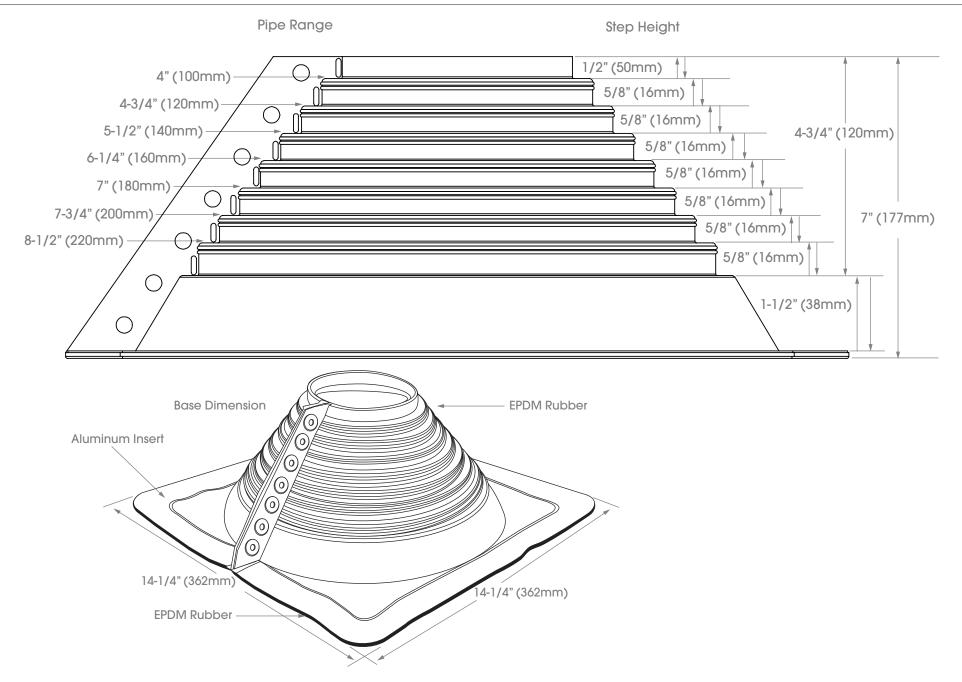

[	DESCRIPTION:	Advanced Ozone Resistance tested to	EPDM 70 hour @ 500 pphm	RED & GREY HIGH TEMP SILICONE 70 hour @ 500 pphm	ASTM Standard	s:		Materials:
	Pipe Flashing Master Flash® Standard Retrofit #2 Pipe Range: 4" to 9-1/4"(101 to 235mm) • Base: 14-1/4" (362mm)	High Temperature Resistance Intermittent		+260°C (+500°F)				
		Low Temperature Resistance tested to	– 55°C (-67°F)	- 74°C (-101°F)				DRAWING NUMBER:
	Confidentally Agreement	Compression Set Maximum	25%	50%		NAME:	DATE:	
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPERTY OF MARCO INDUSTRIES	BOX QUANITY:			DRAWN BY:			MARCO PART #MFRF201
	THIS DRAWING MAY NEITHER BE USED, COPIED, REPRODUCED OR DISTRIBUTED TO				CHECKED BY:			WIANCO FANT #WIFRF201
	THIRD PARTIES WITHOUT WRITTEN CONSENT.				APPROVED BY:			1

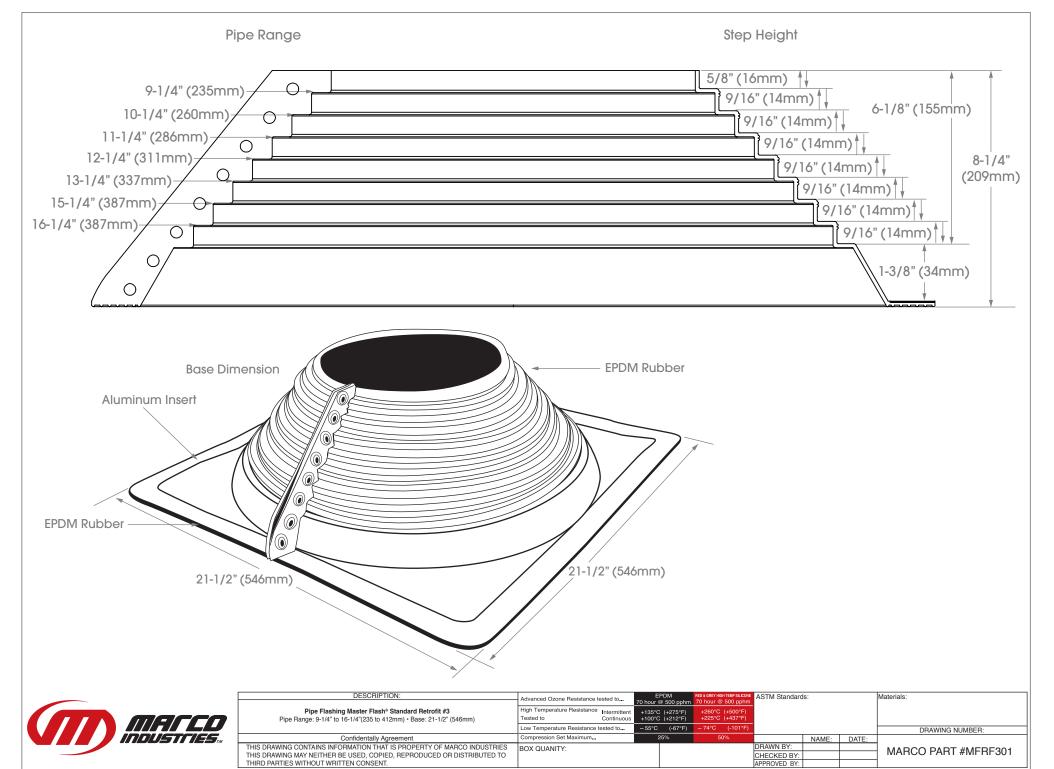

Master Flash® is a registered trademark of the Aztec Washer Company