


New!

FLEXPRO

PROFILE-CUT VENTING MATERIAL

Custom contours

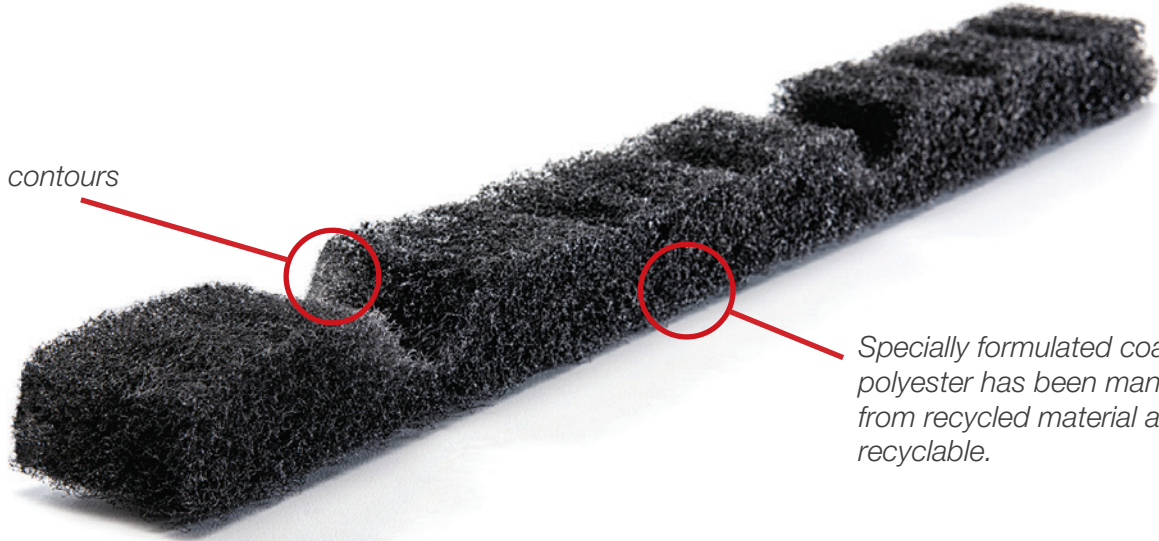

Specially formulated coated polyester has been manufactured from recycled material and is recyclable.

Save on energy costs while protecting your building from moisture, pests and dust with FlexPro,™ exclusively from Marco. Part of the Marco

Weather-Tite™ System and the newest addition to our line of ventilation solutions, FlexPro offers a balanced combination of outstanding features from our superior LP2™ and economical Flex-O-Vent™ products. Made with Marco's unique polyester fiber, FlexPro delivers durable, long-lasting performance.

FlexPro's polyester nonwoven material outlasts and outperforms competitors' polyurethane products. Unlike polyurethanes that absorb moisture, can freeze and block ventilation, FlexPro is made to perform in all seasons and is backed by Marco's 40-year limited product warranty.

- Effective rib-cut profile fits most metal roofs
- High density ensures quick, full material recovery after installation
- Easy, one-person installation

- Eliminates condensation and prevents moisture, pest and dust from entering the structure
- Reduces utility bills through added attic ventilation
- Low profile design offers non-obtrusive appearance
- 2 beads of M63 Marco proprietary adhesive for superior hold
- Available in box or roll quantities

FLEXPRO™

➤ **FLEX-O-VENT**
GOOD

Our original, most economical polyester-based ventilation product.

FLEXPRO
BETTER

New! A profile-cut strip or roll designed to fit most roof panels.

LP2 RIDGE VENT
BEST

Premier custom-cut vent strip includes Python™ polyester vent material inserts for optimum fit and ventilation.

The Marco Weather-Tite™ System

Closure

Ventilation

Fasteners

Flashing

Sealants

Underlayment

Accessories

- ▶ Value drives everything we do. That's why we developed the Marco Weather-Tite System—a comprehensive line of products that offers easy installation, remarkable building ventilation, lower utility costs, extreme durability, and outstanding warranties. Get more quality, more performance and more value ... from Marco.

FLEXPRO™



Marco's proprietary M63 continuous double-bead adhesive is key to quick, easy FlexPro installation.

Specs

Net Free Area: FlexPro Panel Fit - 1-1/8" free-standing product, NFA 26 sq. in.*

Available In: 3' stick, 20' and 50' rolls

Air Permeability: >800 cubic feet per minute

Tear Strength: 3.5 ppi

Tensile Strength: 16 psi – Elongation 175%

Compressive Strength: 1.8 psi at 75%

ASTM Testing: D1929, D737

*Effective Net Free Area varies based on product height, panel profile, and installation methods.



You May Also Need

- ▶ Roof Boots™ / Weather-Tite Metal Roof Sealant

Easy Install

See our installation instructions online at MarcoIndustries.com. To install FlexPro, simply peel and stick the product to the metal roof, careful to match the custom-cut contours to roof ridges. Next put the ridge cap in place and fasten down-slope from the FlexPro product (shown below):



Step 1:

FlexPro comes in various panel configurations, roll and stick package options. Apply the FlexPro Ridge Vent to metal roof by removing the backing paper.



Step 2:

Align the FlexPro Ridge Vent 1/2"-1" up-slope from the edge of the ridge cap. Place onto metal roof with adhesive side down. *Note that the adhesive is strong and once put in place it will be hard to move. Be sure the FlexPro Ridge Vent is in place the first time.*



Step 3:

When attaching consecutive FlexPro Vents, butt fit the pieces together. Marco Weather-Tite Metal Roof Sealant can be used to seal the butt joint. Place ridge cap over FlexPro. Secure in place with Marco QuickGrip/QuickDrill fasteners; fasten through the metal roof ridge locations, avoiding penetrating the FlexPro material, using a min. 3300 rpm screw gun.



Value through the Roof.

800.800.8590 / MarcoIndustries.com



Marco's Rapid Response™ delivers, faster and easier. Take advantage of free shipping with low minimum orders.