




HYDRASHELL™ SUPREME

The premium synthetic underlayment choice with a limited lifetime warranty.

HydraShell™ SUPREME is a 100% premium synthetic underlayment that is easy to install, light weight, and offers a low slip bottom coating. The unique four layer construction makes it 20 times stronger than #30 felt. Each 10 square roll weighs less than 26lbs. and is attached with standard roof nails making the installation simple, less expensive, and fast. HydraShell™ SUPREME has a non-woven walking surface and specially formulated low slip bottom side coating offering a safer installation process. HydraShell™ SUPREME is designed for use on steeper slopes under all types of roofing materials; including: asphalt shingles, synthetic shingles, cedar shakes, and metal, and is backed by a limited lifetime warranty.

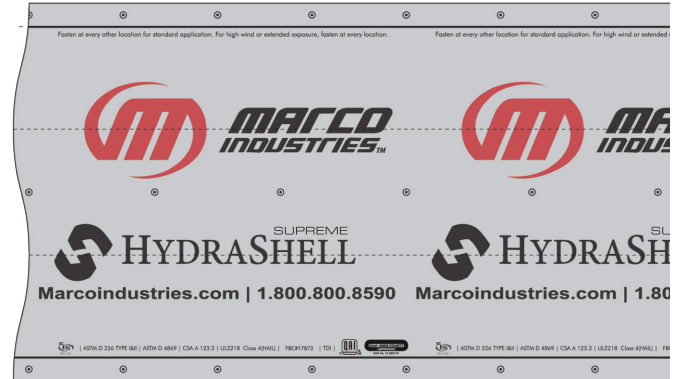

**LIFETIME
LIMITED WARRANTY**

Features and Benefits:

- Non-woven walking surface
- Sure footing with a deck grabbing low slop bottom side coating
- Less weight per roll for easy installation
- Superior lay-flat properties: will not wrinkle or absorb water
- 20x stronger than #30 felt
- Cool Gray surface to reduce heat build-up
- Remains flexible and easy to install in cold climates
- 100 % synthetic
- 90 Day UV exposure rating
- Class A fire rating
- Limited lifetime warranty

Physical Properties	HYDRASHELL™ SUPREME
Roll Dimensions	40" x 300'
Permeability ASTM E96	0.1 perms
Water Transmission ASTM D4869	Pass
Tear Strength ASTM D4533	Md 38 lbs/CD 37 lbs
Tensile Strength ASTM D751	MD 120 lbs / CD 115 lbs
Burst Strength ASTM D751	160 psi
Elongation ASTM D751	20%
Weight per Square ASTM D5261	2.46 lbs
Nominal Thickness ASTM D1777	7.5 mils
Temp. Range (Internal)	-70 F to 240 F



Value through the Roof.

800.800.8590 / MarcoIndustries.com



Marco's Rapid Response™ delivers, faster and easier. Take advantage of free shipping with low minimum orders.