

FlexPro

PROFILE-CUT
VENTING MATERIAL

Ridge Vent

Save on energy costs while protecting your building from moisture, pests and dust with FlexPro,™ exclusively from Marco.



Features:

- ▶ Effective rib-cut profile fits most metal roofs.
- ▶ High density ensures quick, full material recovery after installation.
- ▶ Eliminates condensation and prevents moisture, pest and dust from entering the structure.
- ▶ Easy, one-person installation.
- ▶ Reduces utility bills through added attic ventilation.
- ▶ 2 beads of M63 Marco proprietary adhesive for superior hold.
- ▶ Available in box or roll quantities.
- ▶ A profile-cut strip or roll designed to fit most roof panels.
- ▶ Green Product.

EXPAND YOUR ROOFING SYSTEM PERFORMANCE
PREVENT LEAKS • PROTECT PROPERTY • ASSURE VENTILATION

INSTALLATION INSTRUCTIONS


VALUE DRIVES EVERYTHING WE DO

Value drives everything we do. That's why we developed a comprehensive line of ventilation products that offer easy installation, remarkable building ventilation, lower utility costs, extended roof deck life, extreme durability, and outstanding warranties. Get more quality, more performance, and more value...from Marco Industries™

EASY INSTALL

See our installation online at marcoindustries.com

To install FlexPro, simply peel and stick the product to the metal roof, careful to match the custom-cut contours to roof ridges. Next put the ridge cap in place and fasten down-slope from the FlexPro product (shown below):

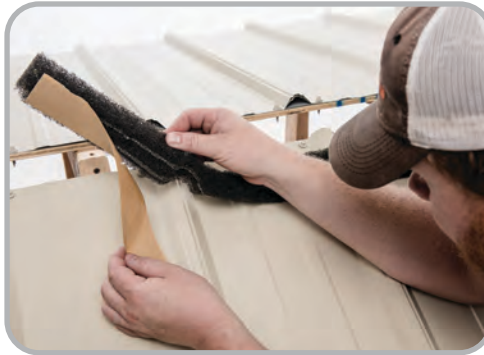

Step 1:

Flexpro comes in various panel configurations, roll and stick package options. apply the Flexpro ridge vent to metal roof by removing the backing paper.

Step 2:

Align the FlexPro Ridge Vent 1/2"-1" up-slope from the edge of the ridge cap. Place onto metal roof with adhesive side down. Note that the adhesive is strong and once put in place it will be hard to move. Be sure the FlexPro Ridge Vent is in place the first time.

Step 3:

When attaching consecutive FlexPro Vents, butt fit the pieces together. Marco Weather-Tite Metal Roof Sealant can be used to seal the butt joint. Place ridge cap over FlexPro. Secure in place with Marco QuickGrip/QuickDrill fasteners; fasten through the metal roof ridge locations, avoiding penetrating the FlexPro material, using a min. 3300 rpm screw gun.

SPECS:

Net Free Area: FlexPro Panel Fit - 1-1/8" free-standing product, NFA 26 sq. in.*

Available in: 3' stick, 20' and 50' rolls

Air Permeability: >800 cubic feet per minute


Tear Strength: 3.5 ppi

Tensile Strength: 16 psi – Elongation 175%

Compressive Strength: 1.8 psi at 75%

ASTM Testing: D1929, D737

*Effective Net Free Area varies based on product height, panel profile, and installation methods.



Marco's proprietary M63 continuous double-bead adhesive is key to quick, easy FlexPro installation.



1-800-800-8590 / Marcoindustries.com

