



Roofing Ventilation & Accessories

Mastix Butyl Tape

STAYING POWER

Choose the sealant that will stick around before and after installation.



Features:

- ▶ Trimmable joint and end lap sealing tape.
- ▶ Non-staining, permanently flexible.
- ▶ Seals around windows, doors, roof vents, and more.
- ▶ Keeps even hot metal roofing panels in place—no melting or oozing.
- ▶ High quality adhesive.
- ▶ Adhesive prevents the product roll from “telescoping.”
- ▶ Superior adhesive which is end-to-end fit.
- ▶ Joins metal to metal roofing panels.
- ▶ Made in North America

MASTIX

EXPAND YOUR ROOFING SYSTEM PERFORMANCE
PREVENT LEAKS • PROTECT PROPERTY • ASSURE VENTILATION

INSTALLATION INSTRUCTIONS

VALUE DRIVES EVERYTHING WE DO

Value drives everything we do. That's why we developed a comprehensive line of ventilation products that offer easy installation, remarkable building ventilation, lower utility costs, extended roof deck life, extreme durability, and outstanding warranties. Get more quality, more performance, and more value...from Marco Industries.™

EASY INSTALL


See our installation online at marcoindustries.com

Mastix requires no tools for installation. It comes in an easy-to-handle roll and the adhesive is quickly exposed with a simple peel-back.



Step 1:

Roll Mastix Butyl tape out on through-fastened and standing seam panels, removing the release paper to expose adhesive.

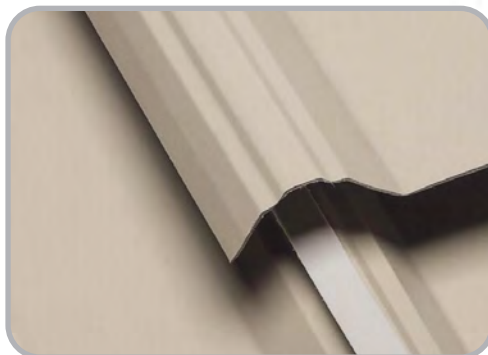

Step 2:

Position panel over Mastix.



Step 3:

When positioned, press panel down on Mastix and fasten in place with Quik-Drill™ or QuikGrip™ fasteners.

SPECS:

3/32" x 3/8" x 45': 16 rolls/carton, 30 carton/pallet

3/32" x 1/2" x 45': 16 rolls/carton, 30 carton/pallet

3/32" x 3/4" x 45': 16 rolls/carton, 30 carton/pallet

3/32" x 1" x 45': 12 rolls/carton, 30 carton/pallet

Chemical Name: Isobutylene

Chemical Family: Butyl Mixture

Health Hazard: 0-Minimal

Flammability Hazard: 0-Minimal

Reactivity Hazard: 0-Minimal

Volatile (WL)%: 0

Solubility in Water: Insoluble

Specific Gravity: (H2O=1) 1.59-1.64

Evaporation Rate: Not Applicable

Appearance: Soft, pliable gum

Color: Q-126 (off-white to gray), Q126BB (black),
Q-126-10 (off-white to gray)

Odor: None



1-800-800-8590 / Marcoindustries.com



Roofing Ventilation & Accessories